


Providers of the most complete line of detectable warnings since 1994

# RediMat™

the original flexible surface applied mat

The original surface applied RediMat detectable warning is constructed of extremely durable, UV protected polyurethane. This flexible mat has a proprietary pre-applied adhesive system that enables installation in less than 10 minutes, drastically reducing labor time and expense, but not at the cost of durability.

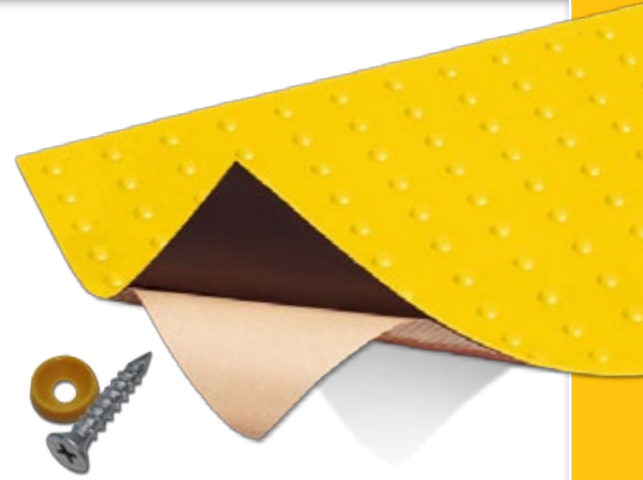

## Features

- **No adhesives to apply** – simply remove protective backing, exclusive peel & stick technology
- **Installs on both asphalt and concrete** – multi-surface adhesive system
- **Conforms to uneven surfaces** – flexible polyurethane material
- **Unbreakable** – will not chip, crack, or splinter
- **Radius Ready** – Available in “Wedge” shape
- **Beveled Edge** – For easy pedestrian access
- Includes stainless steel anchors to meet DOT requirements



## Installation



*Easiest installation of any surface applied detectable warning. Just peel and stick, roll the mat to ensure a secure bond and install stainless steel anchors. Less than 10 minutes - start to finish.*

## Physical Characteristics

- **Hardness** - 90 (Shore A)
- **Stain Resistance** - No Significant Change
- **Dome Spacing** - Inline, 2.35”
- **Slip Resistance** - .90
- **Taber Abrasion** - (1000gms/1000 cycles) 150mgs
- **Color** - Integral Throughout

## Colors



Safety Yellow



Brick Red




Black




Grey


## Sizes




2' x 3'




2' x 4'




2' x 5'



3' x 2.5'



3' x 4'



3' x 2.5'

3' x 2.5'

3' x 5'



Wedge

10 ft  
radius



# Detectable Warning Systems




\* Manufactured in  
California

## alerttile®

### semi-rigid surface applied detectable warning

AlertTile® is a glass reinforced thermoset composite engineered for superior impact resistance, slip resistance, wear resistance and long-term durability for retrofit applications.

AlertTile®'s exclusive design incorporates a thin, slightly flexible profile with a perimeter beveled edge to provide a safe pedestrian transition.

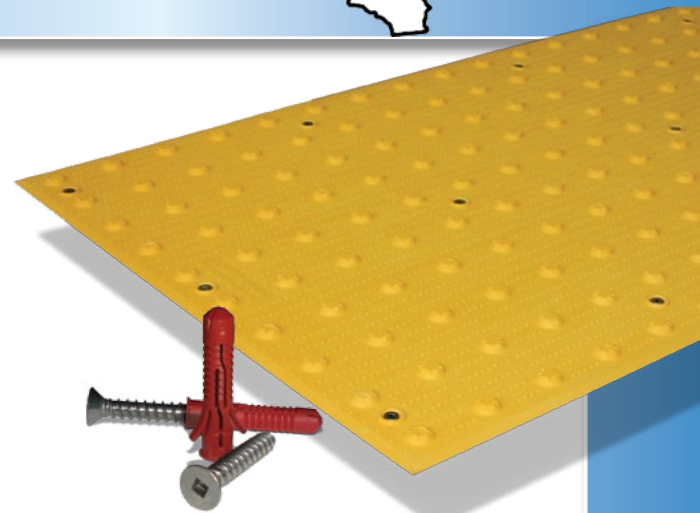

Stainless Steel Anchors

## Features

- **Semi-rigid composition** – 30,000 psi strength yet flexible enough to conform to ramp irregularities
- **Premium UV Treatment**– ensures long term color retention
- **Proven Anchoring System** – premium adhesive and HILTI HUD-1 anchors with stainless steel screws
- **Perimeter Beveled Edges** – for safe pedestrian transition

## Installation



*Fast, easy installation with included adhesive and anchor system. Apply adhesive to scored areas on back, place in desired location and install anchors.*

## Physical Characteristics

- **Compressive Strength** - 30,000 psi
- **Flexural Strength** - 18,000 psi
- **Dome Spacing** - 2.35" Center to Center
- **Slip Resistance** - Dry = 1.03 / Wet = .83
- **Freeze / Thaw Durability** - Pass-No change
- **Color** - Integral Throughout

## Colors



Safety Yellow



Colonial Red



Brick Red




Black




Gray


## Sizes




2' x 3'




2' x 4'



2' x 5'



3' x 4'



3' x 5'



Contractor preferred since 1994

866.999.7452

[www.detectable-warning.com](http://www.detectable-warning.com)

Scan for  
more info



# Detectable Warning Systems




\* Manufactured in California  
\* Caltrans approved

## alertcast®


the industry's best replaceable cast-in-place detectable warning

AlertCast® is a glass-reinforced thermoset composite engineered for superior impact resistance, slip resistance, wear resistance and long-term durability. The exclusive design incorporates a top panel of superior slip-resistant truncated domes and bottom docking anchors that are embedded into wet concrete.

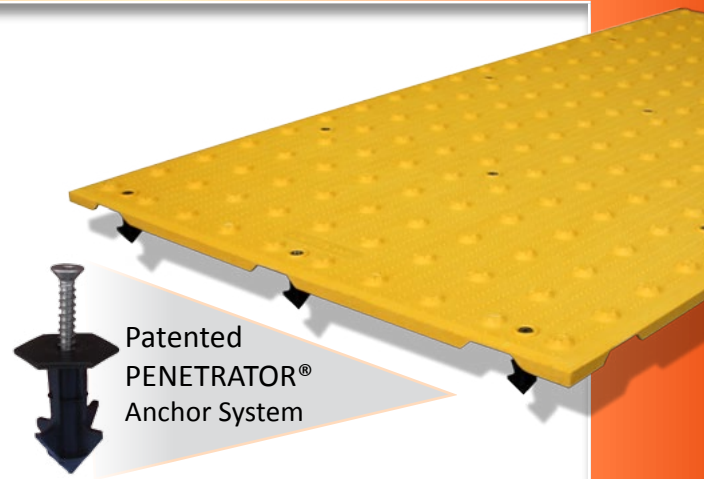

### Features

- **Replaceable, uses patented PENETRATOR anchoring system** – simple wet concrete installation with minimal aggregate displacement and maximum holding capabilities. Easy tile replacement should the need arise.
- **Premium UV Treatment** – ensures long term color retention
- **Superior strength and impact resistance** – reinforced to over 30,000 psi, yet lightweight
- **All weather performance** – hot and cold climate superiority
- **Delivered ready to install** – anchors in place, protective sheeting with attached installation instructions in English and Spanish

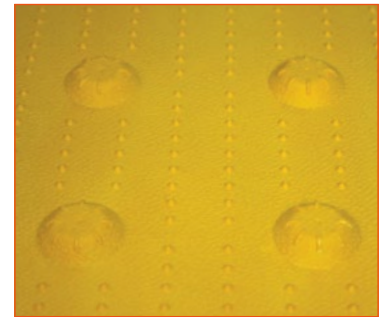

Superior Wet/Dry Slip Resistance

### Installation



*Simple place and press process with the patented PENETRATOR® anchor system.*

### Physical Characteristics

- **Compressive Strength** - 30,000 psi
- **Flexural Strength** - 18,000 psi
- **Dome Spacing** - 2.35" Center to Center
- **Slip Resistance** - Dry = 1.03 / Wet = .83
- **Freeze/Thaw Durability** - Pass - No Change
- **Color** - Integral Throughout

### Colors



Yellow



Colonial Red



Brick Red




Black




Gray


### Sizes




2' x 3'




2' x 4'



2' x 5'



3' x 4'



3' x 5'



Contractor preferred since 1994

866.999.7452

[www.detectable-warning.com](http://www.detectable-warning.com)

Scan for  
more info




## Cast Iron

**extremely strong replaceable detectable warning plate**

The cast iron plates from DWS are lighter weight and cast from an extremely durable ductile iron. They are designed for use in cold harsh climates with snow removal concerns. The plate design allows for easy installation and replacement should the need ever arise.

### Features

- **Easy to install** – unique anchor bars and stainless steel hardware set easily and reduce installation time
- **Durable, yet lighter weight** – premium ductile iron, but with a design that eliminates unnecessary weight
- **Delivered ready to install** – anchor bars in place
- **Natural patina or premium colors** – weathers to an aesthetic natural patina finish, or premium colors via an e-coat then powder coat process
- **Surface slip resistance of .90**
- **ADA/DOT compliant**

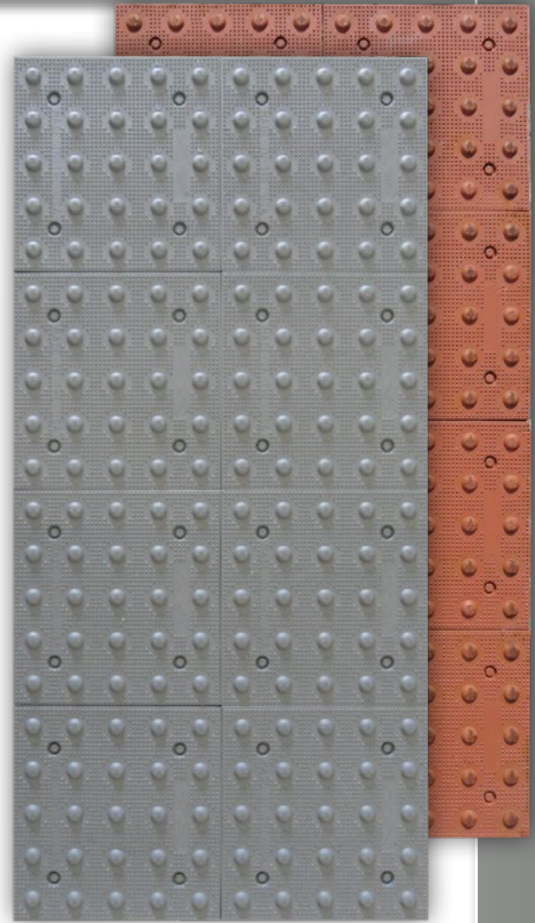

### Installation




### Colors



Uncoated  
(weathered patina)



Yellow



Brick Red




Gray

(Custom Colors Available)


### Sizes




2' x 2'



2' x 3'



2' x 4'



2' x 5'



Wedge

10 ft  
radius



Wedge

15 ft  
radius